




## DESCRIPTION

- ◆ Wattage Selectable.
- ◆ Class P driver, 0-10V dimming capability is standard.
- ◆ Polycarbonate lens with 130 degree.
- ◆ Optional mountings: surface mount and hanging mount.
- ◆ The fixture can be lengthened in field.
- ◆ Optional PIR sensor, microwave sensor and emergency back up are available.
- ◆ cULus listed for damp locations.
- ◆ 5-year warranty.

# LED LINEAR STRIP LIGHT




## ACCESSORIES

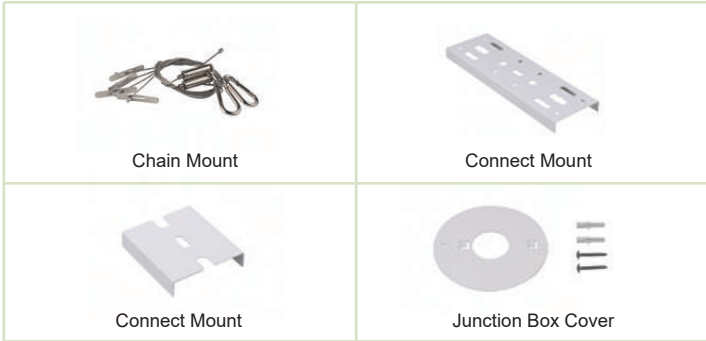


Watt	Voltage	Lumens	Efficacy	Net Weight	Wattage Selectable	PF	CRI	Beam Angle
20W	120-277 Vac 220-240 Vac	2600~2800 lm	130~140 lm/w	0.8 KG	/	≥0.9	>80	130°
40W		5000~5320 lm	125~133 lm/w	1.5 KG	40W,30W,20W			
60W		8000~8500 lm	132~140 lm/w	2.7 KG	60W,50W,40W			
70W		9240~9800 lm	132~140 lm/w	2.7 KG	60W,50W,40W			
80W		10320~10720 lm	129~134 lm/w	2.7 KG	80W,70W,60W			
90W		10890~11880 lm	121~132 lm/w	2.7 KG	90W,80W,70W			

## DIMENSIONS


20W

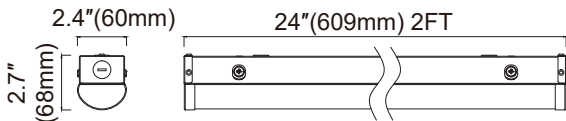

40W

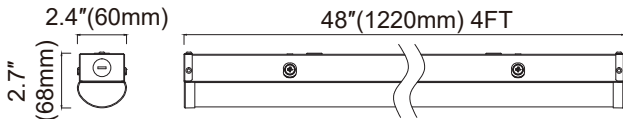

60W,70W,80W,90W

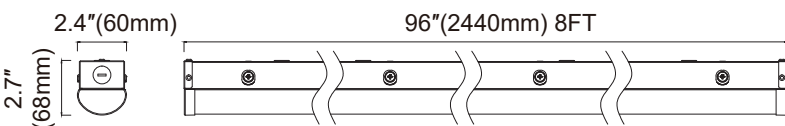

## INSTALLATION DIAGRAM

