



DESCRIPTION

- ◆ Rich housing colors: White, Brown.
- ◆ CCT Selectable 3000K/4000K /5000K and single CCT options.
- ◆ 1-10V dimming capability is standard.
- ◆ Mounting options include surface-mounting and pendant-mounting using 3/4" electrical conduit.
- ◆ Polycarbonate lens with 150 degree.
- ◆ cULus listed for wet locations in ambient temperatures from -30°C to 50°C (-22°F to 122°F).
- ◆ 5-year warranty.
- ◆ Wet (IP65) rating.


ROUND PARKING GARAGE LIGHT




Watt	Voltage	Lumens	Efficacy	Net Weight	CCT Selectable	PF	CRI	Beam Angle
25W	120-277 Vac	3250-3500 lm	130-140 lm/w	1.6 KG	3000K 4000K 5000K	≥0.9	>80	150°
40W		5200-5600 lm	130-140 lm/w	1.64 KG				
55W	220-240 Vac	7150-7700 lm	130-140 lm/w	1.69 KG				
75W	120-347 Vac	9750-10500 lm	130-140 lm/w	2.10 KG				
100W		13000-14000 lm	130-140 lm/w	2.10 KG				

DIMENSIONS

25W,40W,55W

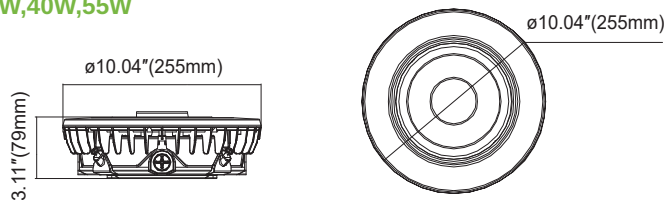

75W,100W

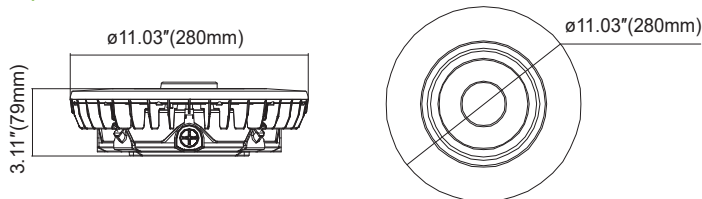

INSTALLATION DIAGRAM

