



DESCRIPTION

- ◆ Available in 3000K~5700K color temperatures.
- ◆ Wattage Selectable.
- ◆ 85W-320W can support with CCT Selectable 4000K,5000K.
- ◆ 0-10V dimming drivers and CRI80 LED Chips.
- ◆ Die casting texture better, appearance looks more integrated and exquisite , without screws.
- ◆ Chain,Wire Guard, emergency driver,PIR Sensor, DC sensor, Surface Mount, Pendant Mount accessories options.
- ◆ UL cUL listed for damp locations in ambient temperatures from -30°C to 50°C.
- ◆ 5-year warranty.

LED LINEAR HIGHBAY LIGHT



ACCESSORIES


 Pendant Mount	 Surface Mount	 Sensor
 Chain Mount	 Wire Guard	 Lifting Rope
 Emergency driver		




Watt	Voltage	Lumens	Efficacy	Net Weight	Wattage Selectable	CCT Selectable	PF	CRI	Beam Angle
85W	120-277 Vac 220-240 Vac 120-347 Vac	11600~12500 lm	136~142 lm/w	1.9 KG	85W,75W,65W	4000K 5000K	≥0.9	>80	90°
110W		14500~15500 lm	136~143 lm/w	1.9 KG	110W,90W,70W				
130W		17600~18500 lm	136~142 lm/w	2.0 KG	130W,110W,90W				
150W		17600~18500 lm	136~142 lm/w	2.0 KG	150W,130W,110W				
165W		22500~24000 lm	136~143 lm/w	2.6 KG	165W,150W,130W				
220W		30000~32000 lm	138~143 lm/w	2.7 KG	220W,200W,180W				
295W		41000~43000 lm	136~143 lm/w	3.6 KG	295W,275W,255W				
320W		41000~43000 lm	133~143 lm/w	3.6 KG	320W,300W,275W				
400W	120-277 Vac	54000~58000 lm	135~145 lm/w	7.0 KG	400W,380W,360W	/			
500W	220-240 Vac	67000~72000 lm	135~145 lm/w	7.2 KG	500W,480W,450W				
600W		81000~87000 lm	135~145 lm/w	7.3 KG	600W,500W,400W				

DIMENSIONS


85W,110W,130W,150W




165W,220W



220W L,295W,320W

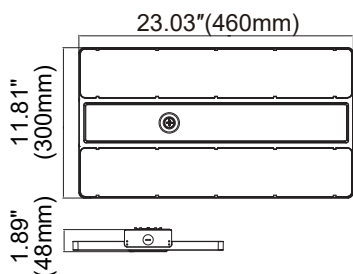

400W,500W,600W

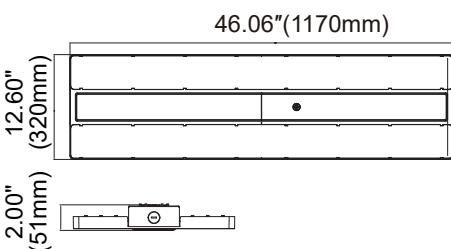

INSTALLATION DIAGRAM

