



DESCRIPTION

- ◆ IP65 rated Rich housing colors: White, Black.
- ◆ 3000/4000/5000K CCT Selectable and Wattage selectable.
- ◆ 0-10V dimming capability is standard.
- ◆ Mounting options include suspension from eyebolt (standard), Surface Mount, snap hook, and attachment to electrical conduit.
- ◆ Polycarbonate lens with 90 degree.
- ◆ 5-year warranty.
- ◆ Wet (IP65) rating.

UFO HIGHBAY LIGHT



ACCESSORIES



| | | | |
|---|---|--|---|
|  Eyebolt mount |  Hook mount |  G1/2 Hook |  Surface |
|  AL reflector |  PC reflector |  Lens |  Wire Guard |
|  Aircraft Cable |  PIR sensor |  Sensor | |





| Watt | Voltage | Lumens | Efficacy | Net Weight | Wattage Selectable | CCT Selectable | PF | CRI | Beam Angle |
|------|--|----------------|--------------|------------|-----------------------------------|-------------------------|------|-----|------------|
| 100W | 120-277 Vac 220-240 Vac 120-347 Vac 277-480 Vac | 13500-14000 lm | 135-140 lm/w | 2.2 KG | Wattage adjustable range 25%-100% | 3000K 4000K 5000K | ≥0.9 | >80 | 90° |
| 150W | | 20250-21000 lm | 135-140 lm/w | 2.2 KG | | | | | |
| 200W | | 27000-28000 lm | 135-140 lm/w | 3.1 KG | | | | | |
| 240W | | 32400-33600 lm | 135-140 lm/w | 3.1 KG | | | | | |

DIMENSIONS

100W,150W

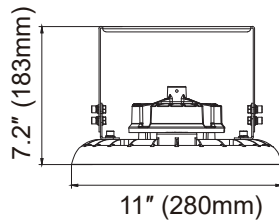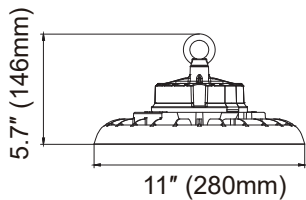

200W,240W

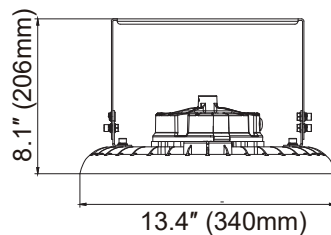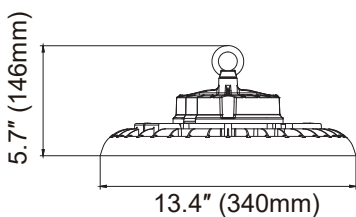

INSTALLATION DIAGRAM

