

Battery Powered Ceiling Sensor




FEATURES

- Easy Installation with multiple mounting options
- 10 years battery life of low maintenance
- Photocell and Motion sensor integrated
- Occupancy/vacancy enabled

DIMENSIONS

Unit: inch/mm

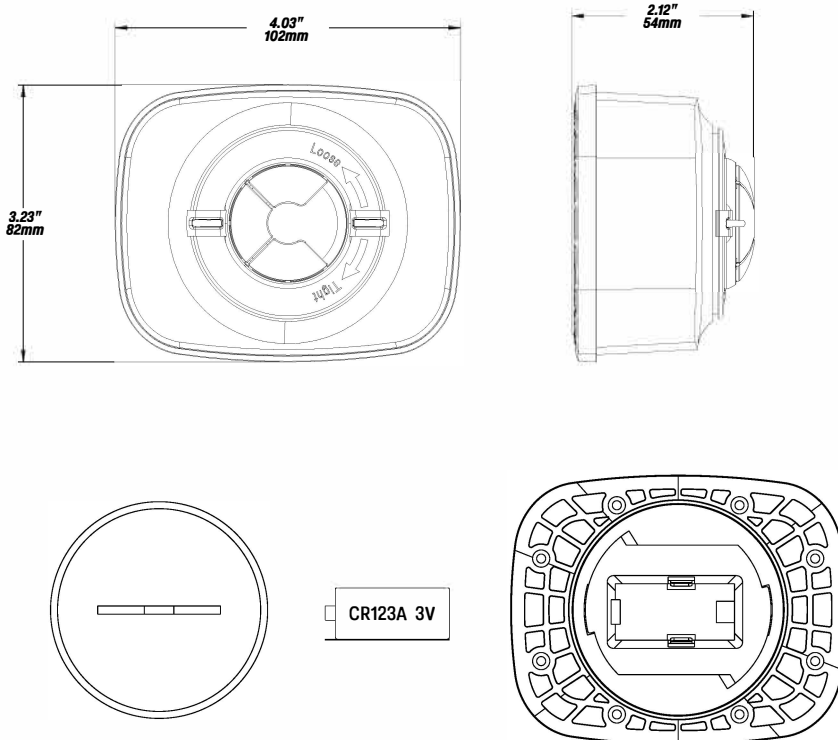

SPECIFICATIONS

Input Voltage: CR123A3V

Bluetooth Transmit: 200ft Max

Radio Frequency: 2.4GHz ± 75MHz

Bluetooth Version: 5.0

Housing Material: UL 94-V0

Indoor Use Only

Operating Temperature: -30°C to 55°C,
-22°F to 131°F

Storage Temperature: -40°C to 60°C,
-40°F to 140°F

IP Rating: IP66

Color: White

Warranty: 5 years warranty

Comply to UL1376, RoHS

FCC ID: 2A26YLTKTVT2022

DID: D061367


DLC: NLTRC5KL0TN

| MODEL | DESCRIPTION |
|--------|--|
| BCS107 | Bluetooth Network Battery Powered Ceiling Sensor |


DIMENSIONS

Unit: inch/mm


MBL1

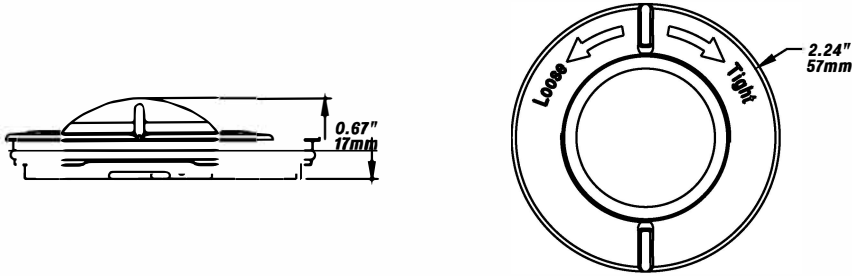

Coverage Side View

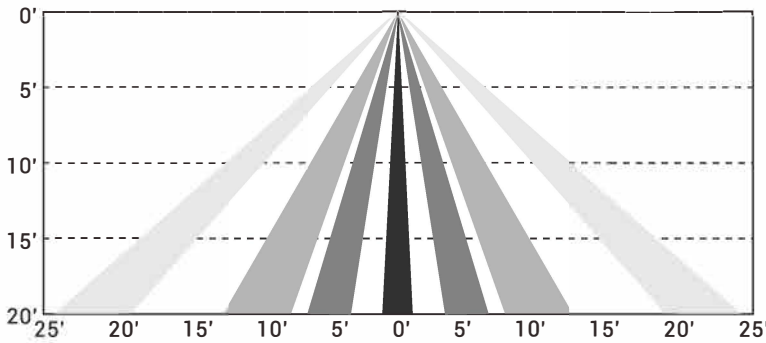

Coverage Top View

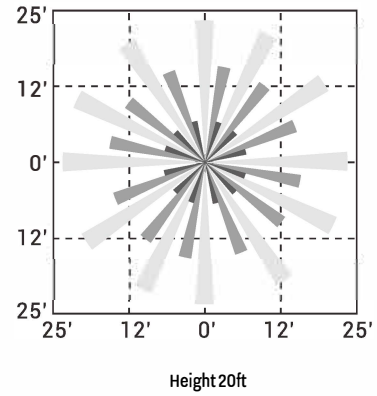

MARKING



The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Litetrace is under license. Other trademarks and trade names are those of their respective owners.

APP DOWNLOAD

