

Inter-Op Bridge



SPECIFICATIONS

- Input Voltage: USB 5V
- Input Current: 500mA Max
- Bluetooth Transmit: 100ft Max
- Radio Frequency: 2.4GHz ± 75MHz
- Bluetooth Version: 5.0
- Housing Material: UL 94-V0,
- Indoor Use Only
- Operating Temperature: -30°C to 55°C,
-22°F to 131°F
- Storage Temperature: -30°C to 85°C,
-22°F to 185°F
- IP Rating: IP20
- Color: White
- Warranty: 5 years warranty

- Comply to UL1376, RoHS
- FCC ID: 2A26YLTkTVT2022
- DID: D061367
- DLC: NLTRC5KL0TN


FEATURES

CR04 is a Wi-Fi dongle, which has a Bluetooth and a Wi-Fi hardware connection. The Bluetooth connects to Lumenativ devices while the Wi-Fi connects to 3rd party systems. It provides Modbus TCP and REST APIs simultaneously over Wi-Fi connections.

- Support mainstream Wi-Fi encryption, such as WPA2_PSK
- Support both DHCP and static IP assignment
- Modbus TCP
- RESTAPI


DIMENSION

Unit: inch/mm

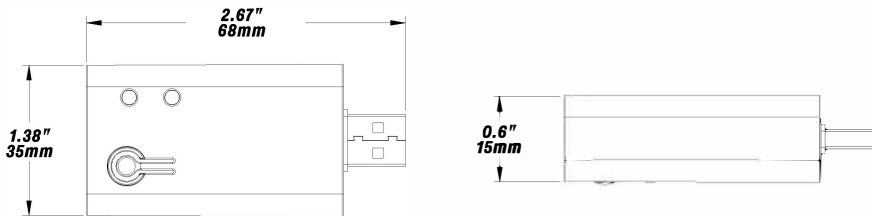

MODEL	DESCRIPTION
CR04	Inter-Op Bridge

MARKING

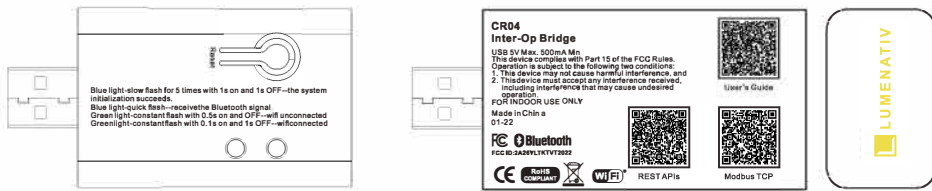

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Litetrace is under license. Other trademarks and trade names are those of their respective owners.

APIs

REST APIs



Modbus TCP



APP DOWNLOAD

