


# Solar Powered Wall Switch




## FEATURES

- Powered by 1 pcs CR2032 battery or USB charging.
- Solar panel for additional power supply.
- Bluetooth communication, commissioned via Keilton mobile app to remote control fixtures.
- No wiring needed, attach it to any flat surface with supplied 3M tape, or just leave it on the desk.


## DIMENSION

Unit: inch/mm

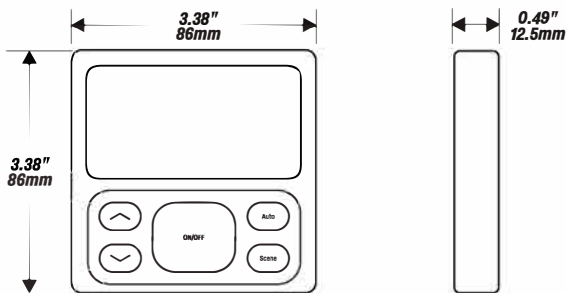


## INSTRUCTION

**Front**

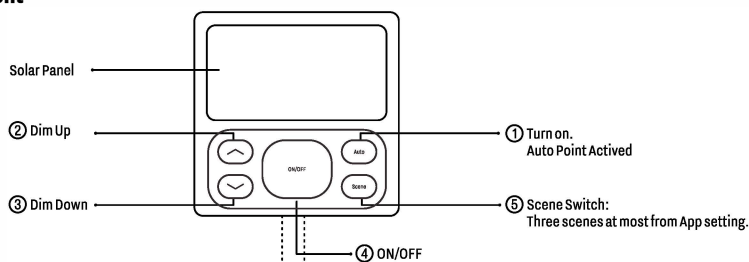

**Side Bottom**



## SPECIFICATIONS

Input Voltage: DC 3V/USB 5V

Bluetooth Transmit: 100ft Max

Radio Frequency: 2.4GHz ± 75MHz

Bluetooth Version: 4.2

Housing Material: UL 94-V0

Indoor Use Only

Operating Temperature: -18°C to 50°C,

-0.4°F to 122°F

Storage Temperature: 0°C to 30°C,

32°F to 86°F

IP Rating: IP20

Color: White

Warranty: 5 years warranty

Comply to UL1376, RoHS



FCC ID: 2A26YLTKTVT2021

DID: D057145

DLC: NLTRC5KL0TN

MODEL	DESCRIPTION
WP1015S	Solar Powered Wall Switch

## MARKING

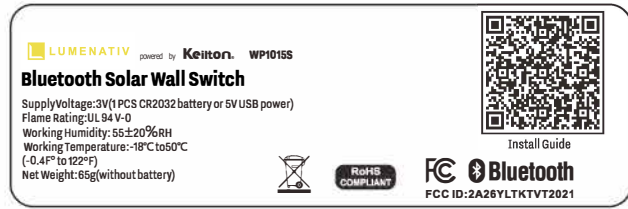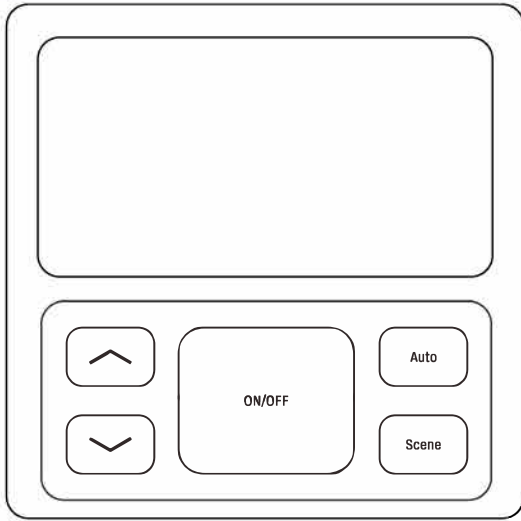

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Lumenativ is under license. Other trademarks and trade names are those of their respective owners.

## APP DOWNLOAD

