



DESCRIPTION

- ◆ Wattage Selectable.
- ◆ CCT Selectable 3000K/4000K /5000K and single CCT options.
- ◆ Novel shape, high light effect.
- ◆ Rich mounting types: AM,YM,FM,Easy to install and operate.
- ◆ 0-10V dimming capability is standard
- ◆ Optional photocell are available.
- ◆ Wet (IP65) rating.
- ◆ 5-year warranty.

LED FLOOD LIGHT




ACCESSORIES

Knuckle bracket (AM)	Yoke mounting bracket (YM)	Flood mounting bracket (FM)
Knuckle bracket (AM)	Yoke mounting bracket (YM)	Flood mounting bracket (FM)


Watt	Voltage	Lumens	Efficacy	Net Weight	Wattage Selectable	CCT Selectable	PF	CRI	Beam Angle
15W	120-277 Vac	1950-2250 lm	130-145 lm/w	1.0 KG	Wattage adjustable range 20%-100%	3000K 4000K 5000K	≥0.9	>80	7H7V 7H6V 6H6V 5H5V
30W	220-240 Vac	3900-4500 lm	130-145 lm/w	1.0 KG					
60W	120-277 Vac	7800-9000 lm	130-145 lm/w	3.5 KG					
80W		10400-12000 lm	130-145 lm/w	5.0 KG					
100W		13000-15000 lm	130-145 lm/w	5.0 KG					
150W		220-240 Vac	19500-22500 lm	130-145 lm/w					
200W	277-480 Vac	26000-30000 lm	130-145 lm/w	5.8 KG					
240W		31200-36000 lm	130-145 lm/w	7.0 KG					
300W		39000-45000 lm	130-145 lm/w	7.0 KG					

DIMENSIONS


15W, 30W

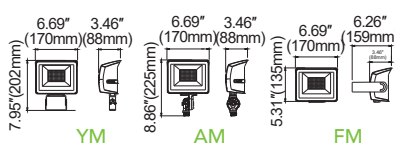


60W

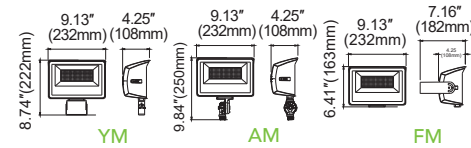


80W, 100W

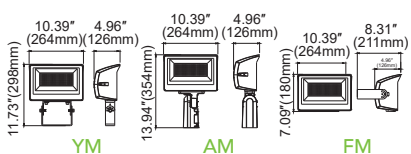

150W, 200W

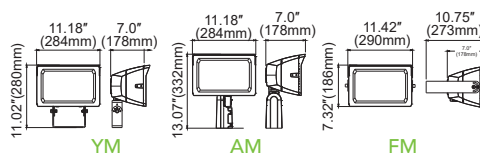

240W, 300W

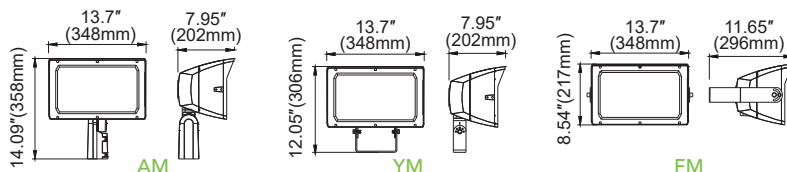

INSTALLATION DIAGRAM

