


## DESCRIPTION

- ◆ CCT Selectable 3000K/4000K /5000K and single CCT options.
- ◆ Wattage Selectable.
- ◆ 0-10V dimming capability is standard.
- ◆ Integral photocell is standard.
- ◆ Wattage adjustable.
- ◆ Optional surge protector, PIR sensor, microwave sensor, emergency back up.
- ◆ 5-year warranty.
- ◆ Wet (IP65) rating.

# LED WALLPACK LIGHT




## ACCESSORIES

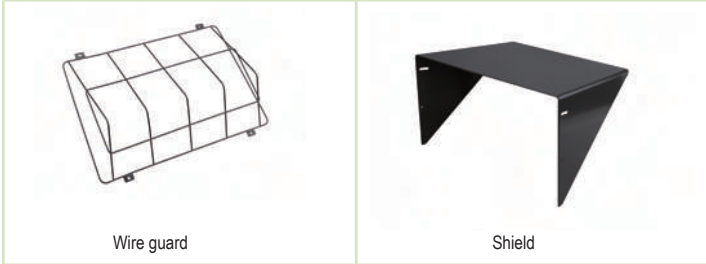

	Watt	Voltage	Lumens	Efficacy	Net Weight	Wattage Selectable	CCT Selectable	PF	CRI	Beam Angle
S	25W	120-277 Vac	3250-3500 lm	130-140 lm/w	2.3 KG	Wattage adjustable range 25%-100%	3000K 4000K 5000K	≥0.9	>80	105°
	40W		5200-5600 lm	130-140 lm/w						
	60W		7800-8400 lm	130-140 lm/w						
M	40W	220-240 Vac	5200-5600 lm	130-140 lm/w	3.3 KG					
	60W		7800-8400 lm	130-140 lm/w						
	80W	120-347 Vac	10400-11200 lm	130-140 lm/w						
	100W		13000-14000 lm	130-140 lm/w						
L	120W	120-347 Vac	15600-16800 lm	130-140 lm/w	5.8 KG					
	100W		13000-14000 lm	130-140 lm/w						
	120W		15600-16800 lm	130-140 lm/w						
	140W		18200-19600 lm	130-140 lm/w						
	150W		19500-21000 lm	130-140 lm/w						

## DIMENSIONS

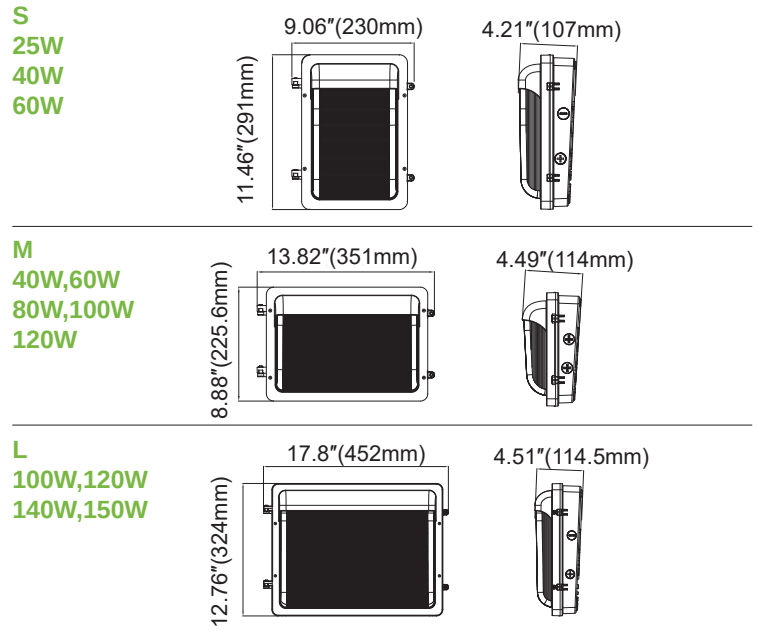

## INSTALLATION DIAGRAM

