

LED Sports Lighting







SP07

- ❁ The driver is placed in a separate driver box, which helps to lower the working temperature and greatly extend the lifetime of the led fixture;
- ❁ The driver box can be disassembled and installed on the bottom of the light pole as a whole, so that the drivers can be replaced without hiring a crane.
- ❁ Fast and convenient wiring, and multiple led fixtures can be connected in series via AC wires;




Specifications


	Power(W)	Input Voltage(V)	Delivered Lumens (lm)	Efficacy (lm/W)	CRI	Beam Angle	Available CCT	Operating Temp	IP Rating	Weight (kg)
	500W	120-277/200-480	70,000-80,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°	4000K/4500K/	-40°~50°C	IP66	16.29
	600W		84,000-96,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°				
	1000W	100-240/200-415	140,000-160,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°	5000K/5700K	-40°~50°C	IP66	34.17
	1200W		168,000-192,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°				
	1500W		210,000-240,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°		-40°~50°C	IP66	50.04
	1800W		252,000-288,000	140-160	Ra>70	15°, 20°, 30°, 40°, 60°, 80°				

	Power(W)	Input Voltage(V)	Beam Angle	Available CCT	Operating Temp	IP Rating	Weight (kg)
	1800	220-415	15°, 20°, 30°, 40°, 60°, 80°	RGB/RGBA/RGBW	-40°~50°C	IP66	50.04

Dimension

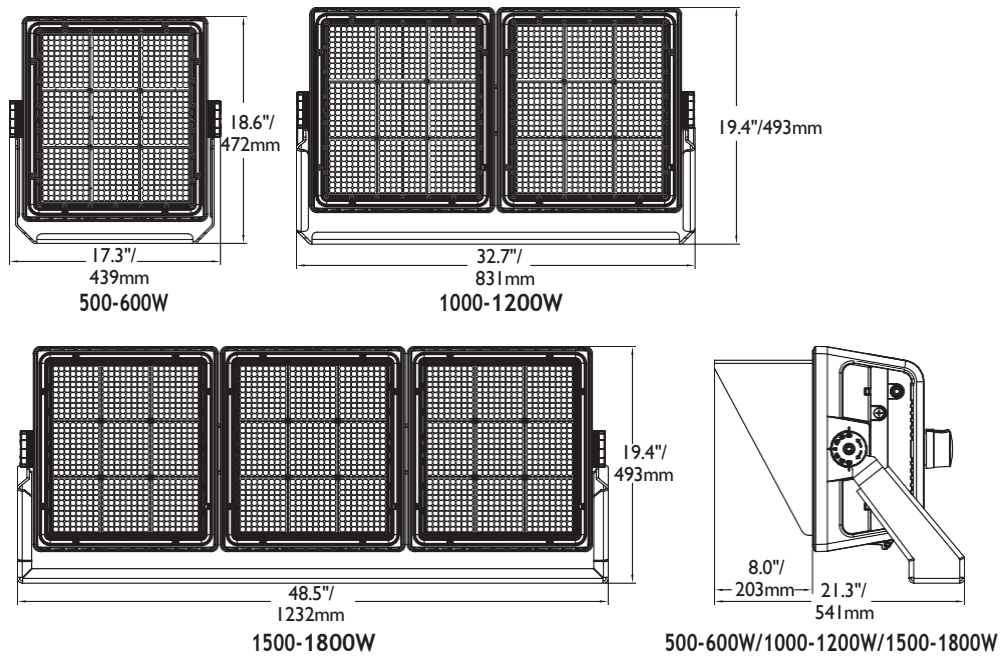

Installation Diagram

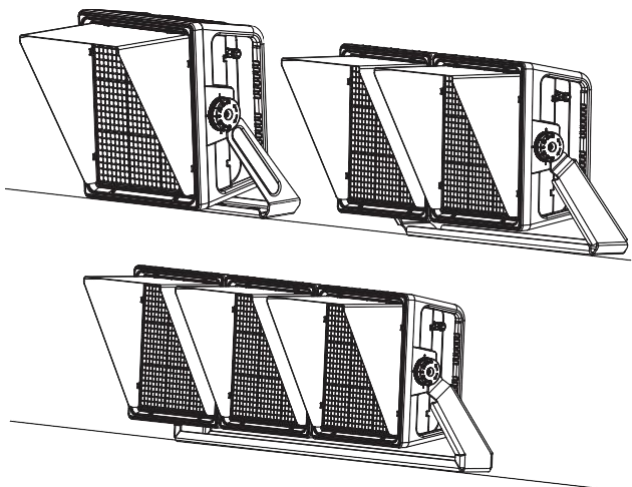

Distribution Diagram

